
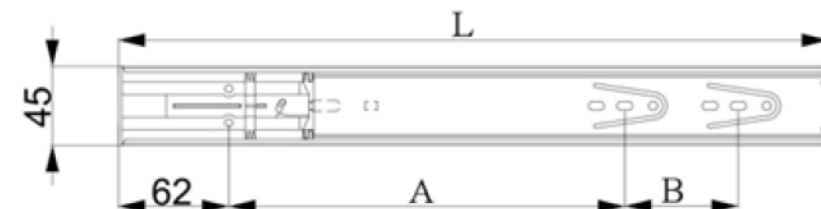
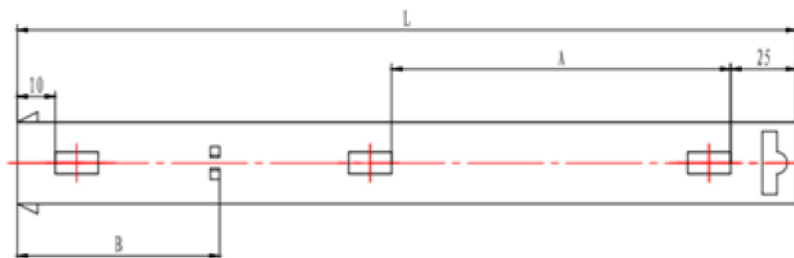


Направляющие шариковые с доводчиком (35 кг)

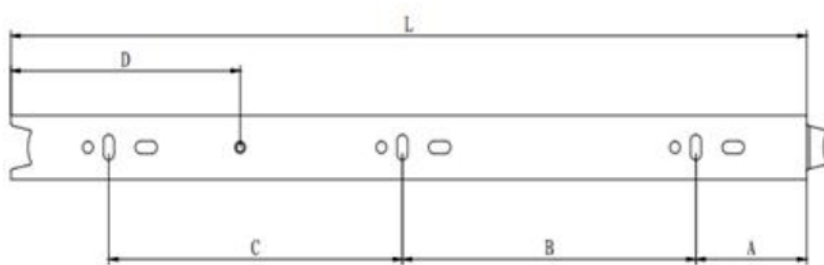

	A	B	C	D-1	L
10°	48,5		160	50	247
12°	43,5	96	128	75	297
14°	43,5	128	128	100	347
16°	43,5	128	160	125	397
18°	43,5	160	192	150	447
20°	43,5	192	192	175	497
22°	43,5	192	256	200	547
24°	43,5	224	256	225	597
26°	48,5	256	256	250	647
28°	48,5	288	288	275	697
30°	48,5	288	320	300	747

	A	B	L-1
10°	65	54	233
12°	92	67	283
14°	115	86	333
16°	141	105	383
18°	165	112	433
20°	190	121	483
22°	215	148	533
24°	240	150	583
26°	265	148	633
28°	290	150	683
30°	320	150	733

	A	B	L
10°	64		250
12°	128		300
14°	96	64	350
16°	160	64	400
18°	224	64	450
20°	256	64	500
22°	320	64	550
24°	352	64	600
26°	192	192	650
28°	224	224	700
30°	224	256	750